




Thule Rapid System Kit 1706

> Instructions

CHEVROLET Onix, 5-dr Hatchback, 12-
CHEVROLET Prisma, 4-dr Sedan, 13-


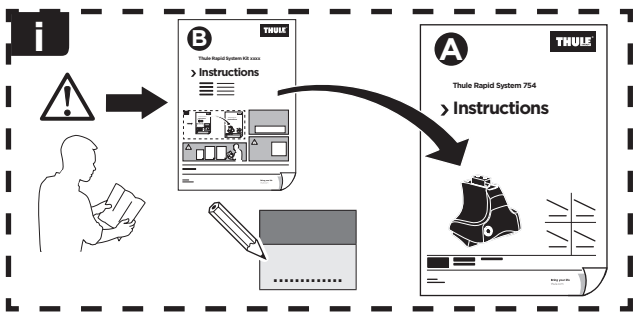


xx kg
xx lbs

 +

7 kg
15,4 lbs

= **Max. 40 kg** **Max. 88 lbs**

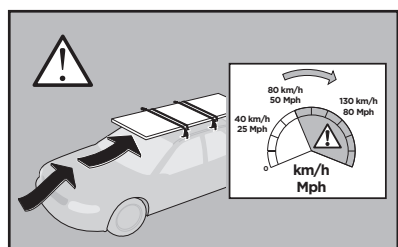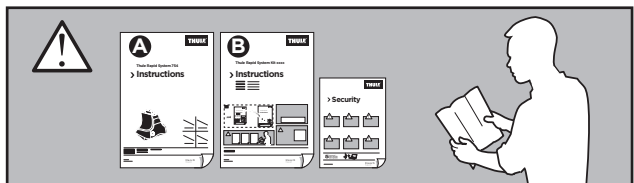


ISO 11154-E

141706
C.20130424
519-1706-02


Bring your life
thule.com




93 x2



204 x1



206 x1



1244 x2



1247 x2






x1



x1

1



	X (scale)	X (mm)	X (inch)
CHEVROLET Onix , 5-dr Hatchback, 12-	33	981	38 ⁵ / ₈
CHEVROLET Prisma , 4-dr Sedan, 13-	33	981	38 ⁵ / ₈

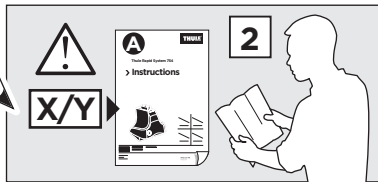


	Y (scale)	Y (mm)	Y (inch)
CHEVROLET Onix , 5-dr Hatchback, 12-	32	971	38 ¹ / ₄
CHEVROLET Prisma , 4-dr Sedan, 13-	32	971	38 ¹ / ₄

2

CHEVROLET Onix, 5-dr Hatchback, 12-
CHEVROLET Prisma, 4-dr Sedan, 13-

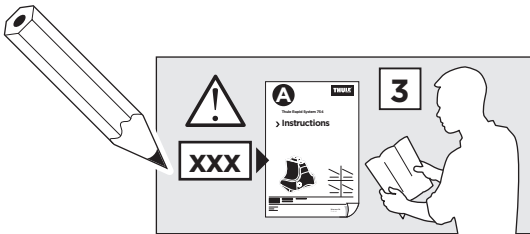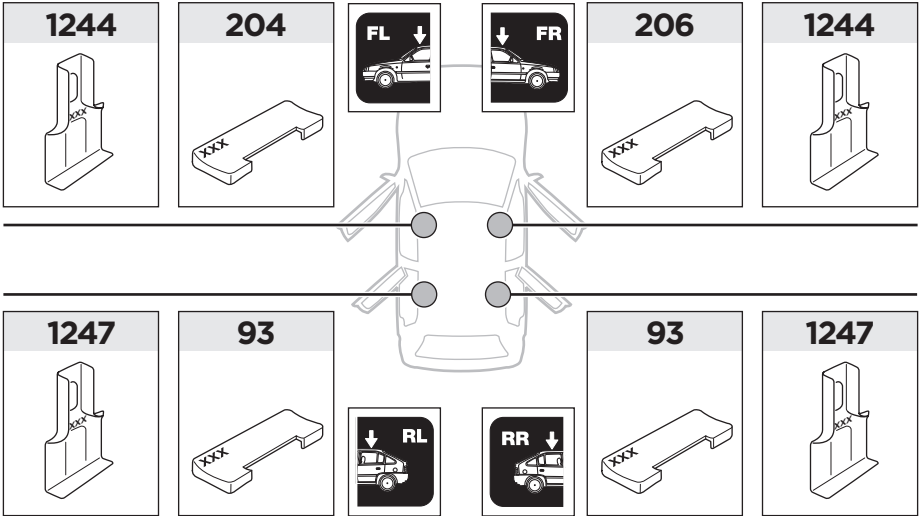

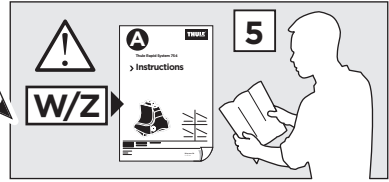3

	W (mm)	Z (mm)	W (inch)	Z (inch)
CHEVROLET Onix , 5-dr Hatchback, 12-	280	700	11	27 1/2
CHEVROLET Prisma , 4-dr Sedan, 13-	280	700	11	27 1/2

